



Dynatron

S603



Super Hi-Tork Starter

Featuring:

- Full protection hand-guard for extra safety
 - 12V and 24V compatible
 - Multiple adaptors available
 - Reversible for CW or CCW operation
-

Sullivan
UNMANNED VEHICLE

Specifications


	
<p>Model numbers:</p>	<p>S603</p>
<p>Torque 12V: 24V:</p>	<p>320 in-oz 512 in-oz</p>
<p>Max RPM 12V: 24V:</p>	<p>3600 7200</p>
<p>Peak Power 12V: 24V:</p>	<p>215 Watts 680 Watts</p>
<p>Supply:</p>	<p>12V/100A 24V/175A</p>
<p>Dimension:</p>	<p>9" x 3.25" x 4"</p>
<p>Weight:</p>	<p>4.37 lbs</p>
<p>Max Engine:</p>	<p>40cc</p>
<p>Wire Specification:</p>	<p>4 feet/12 AVG</p>
<p>Connectors:</p>	<p>2x Alligator Clips</p>

Accessories

S607 1.60" Aluminum cone w/
S605 Standard Rubber Adapter




S642 Battery Box

	S636	3" Silicone Adapter for 1-3/4" to 3-1/2" spinners
	S637	3" Silicone Adapter for 2-1/4" to 6" spinners
	S630	Sullivan 3" Aluminum Starter nose cone
	S631	Silicone Rubber Adapter, Deep/Narrow for 1.60" cone
	S632	Silicone Rubber Adapter, Standard for 1.60" cone
	S633	Silicone Rubber Adapter, Shallow/Short for 1.60" cone
	S982811654	Heavy Duty 6 Gauge Wire
	S613	Helicopter Starting Extension featuring a 6mm Ball Shaft End with oversized one way clutch
	S642	Sullivan Battery Box for cordless starter power, programmable to display battery state of charge

Starter Performance

S603 Starter Performance at 12VDC

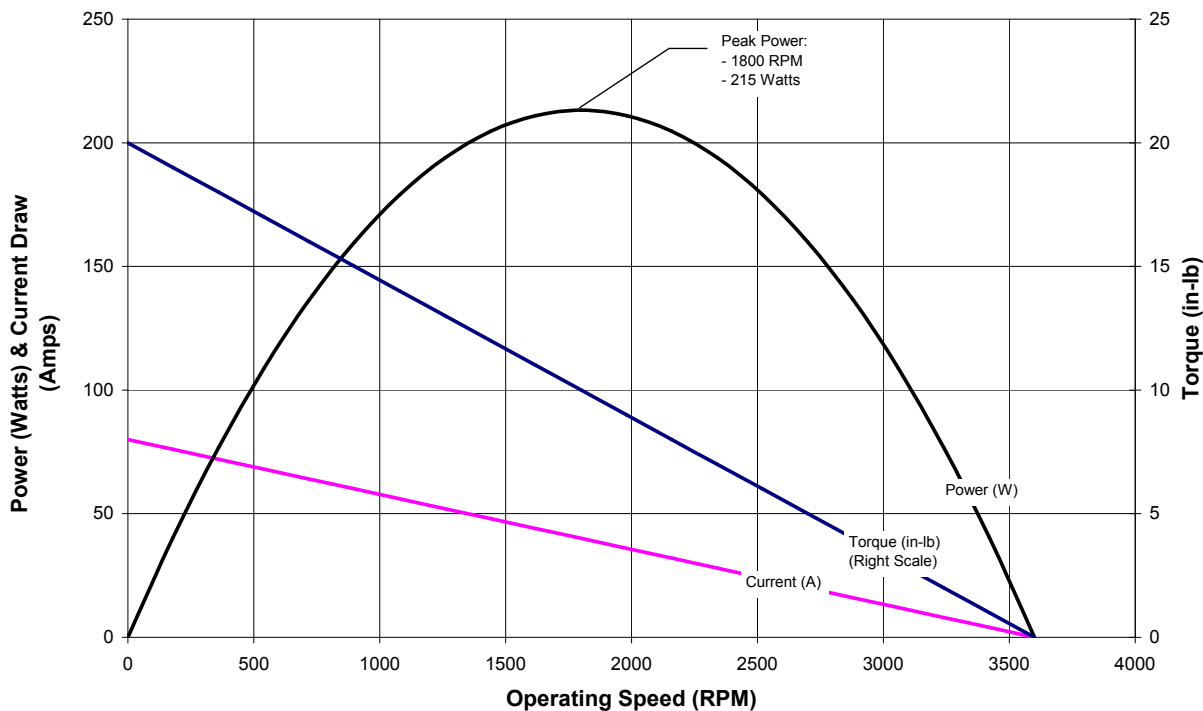

S603 Starter Performance at 24VDC

